


The Very Long Baseline Array Emmanuel Momjian





Instrument Overview

- A 10 element interferometer radio telescope
 - Identical 25m diameter antennas
 - Array dedicated to Very Long Baseline Interferometry (VLBI)
- Antenna sites in US territory from Mauna Kea Hawaii to St. Croix, US Virgin Islands
 - Baseline lengths between236 km and 8611 km

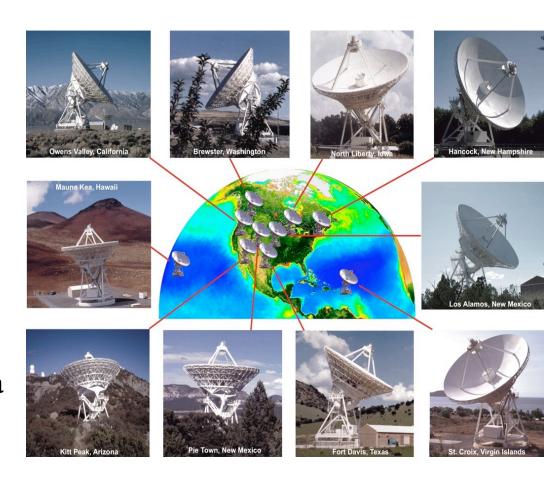





Instrument Overview II

Frequency coverage from 330 MHz (90 cm) to 90 GHz (3mm)

- In 10 frequency bands
- Current highest bandwidth
 256MHz (dual polarization)
- Wide instantaneous spanned bandwidth:
 - S/X mode: simultaneous2.4 GHz and 8.4 GHzobserving
 - C-band receiver:
 simultaneous tunings
 anywhere in 4-8 GHz
 band

λ(cm)	v(GHz)	σ(μJy/beam) in 8 hrs at 2Gbps
90 cm	0.312 - 0.342	266*
50 cm	0.596 - 0.626	681*
21 cm	1.35 - 1.75	10-12
13 cm	2.15 - 2.35	12
6 cm	3.9 - 7.9	6-9
4 cm	8.8 - 0.8	11-15
2 cm	12.0 - 15.4	18
1 cm	21.7 - 24.1	18-22
7 mm	41.0 - 45.0	40
3 mm	80.0 - 90.0	180†





Instrument Overview III

- The RDBE (ROACH Digital Back End) has two systems: the PFB and the DDC
- The PFB has
 - 8 X 32MHz dual pol channels (or subbands in VLA terminology, or IF in AIPS terminology), or I6 X 32 MHz single polarization.
 - These result in 2Gbps recording, the highest data rate.
 - Generally recommended for continuum observations.
- The DDC is (assuming dual pol)
 - either 2 or 4 data channels (subbands) range downward from I28MHz to IMHz in binary steps.
 - again maximum of 256MHz dual pol (2Gbps)
 - Generally used for spectral line.






Science applications of VLBA and VLBI

- VLBI provides a tool to study mas-level structure in radio sources.
 - Active Galactic Nuclei (AGN)
 - Pulsars
 - Masers
 - Supernova/Supernova Remnants
 - Magnetically active stars
 - X-ray binaries
 - Nova



- Synchrotron/cyclotron radiation (electrons in a magnetic field)
- Maser emission (stimulated emission)
- Thermal lines seen in absorption against non-thermal background

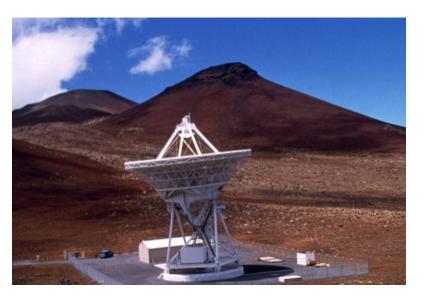






Special correlator capabilities

- Pulsar gate
 - Synchronous correlator gate to improve signal to noise ratio of repeating signals, such as pulsars
- Multi-phase-center capability
 - Can simultaneously correlate at 100s of points in the antenna primary beam
 - Especially effective w/VLBA due to identical antennas
- Ultra-high spectral resolution
 - Using "zoom" modes, can achieve 1 Hz
 - Up to I 32096 channels if justified.
 - Used in some asteroid radar observing



Resident Shared Risk Observing (RSRO)

Some possible RSRO projects:

- VLA (YI) single dish VLBI
- DDC-4 capability at Arecibo
- Rapid response capability
- 3mm VLBI with the LMT






High dynamic range imaging at milliarcsecond resolution

- Locations of 10 antennas carefully chosen for optimal "UV coverage"
- Imaging resolution in different observing bands:
 - L-band (~I.6 GHz / 20 cm): 5 mas
 - X-band (~8 GHz / 4 cm): 0.85 mas
 - Q-band (~50 GHz / 7mm): 0.17 mas
- E.g. for ~I mas resolution
 - I AU at I Kpc
 - Few-10 stellar radii at 100pc

Example: WR 140, imaging the evolution of the colliding wind region in Wolf-Rayet + O binary star system. Separation between stars between ~5-15 mas or 9-27 AU (Dougherty et al. 2010).

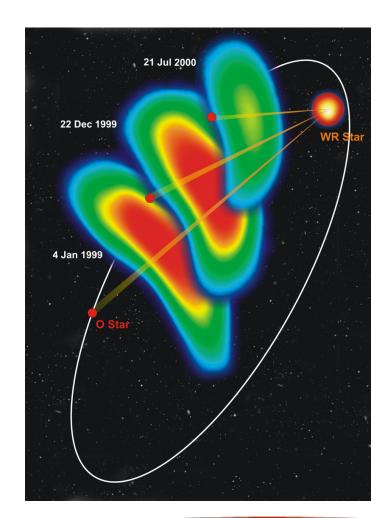






High dynamic range imaging at milliarcsecond resolution


- M87 Jet at 43 GHz (R.C.Walker)
- Challenging: structure changes over time, high contrast

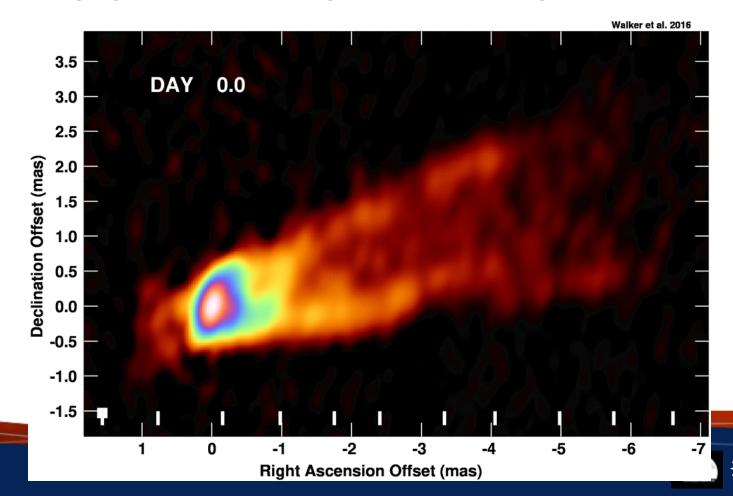



Time-dependent phenomena

- VLBA available 24 hours per day, all year
- Can probe phenomena ranging from hours to years in duration
- VLBI sources tend to be variable in brightness, structure, and polarization
- Perfect instrument for wide range of science within graduate student's thesis timescale!

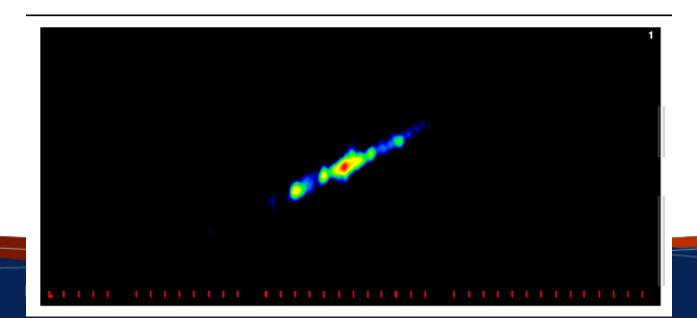

Example: Daily observations of X-ray binary SS433 over 40 days.
(Mioduszewski et al)







Strengths of the VLBA High precision relative astrometry

- Astrometry of a target object relative to a background quasar
 - Usually tied to ICRF to 0.25 mas
- Routinely repeatable at 0.1 mas precision
- Best astrometry to date better than 0.01 mas
- Can be performed on continuum or spectral line sources
 - E.g., pulsars, stars, masers











High precision relative astrometry

 BeSSeL project measures distances to star forming regions through methanol masers (Reid et al.), determining the structure of the spiral arms of the Galaxy.

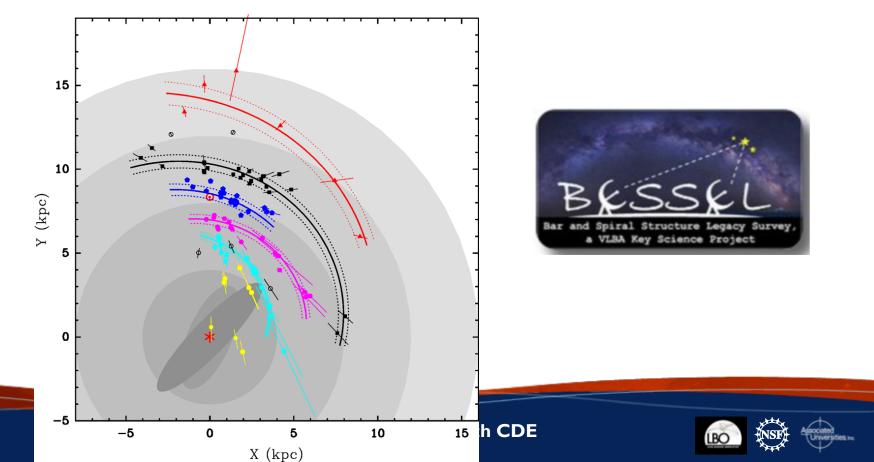

Extended arrays


- VLBA uses data formats and setups compatible with other VLBI antennas
- Routinely involved in High Sensitivity Array (HSA) with Arecibo, phased VLA, Green Bank Telescope and Effelsberg
 - Increases sensitivity by an order of magnitude
- Participates with European VLBI Network in the "Global VLBI Array"
- Joins the Global VLBI Millimeter Array (GMVA) for 86-90 GHz (3mm) observations twice per year. Now with ALMA!
- Participates in global array of geodetic antennas for reference frame measurements.

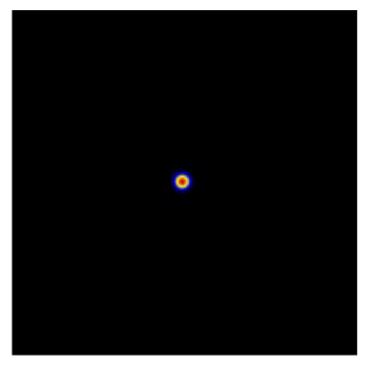

Example: SN 1993J imaged over 10 years with VLBA+DSN+EVN (Bietenholz etal.)





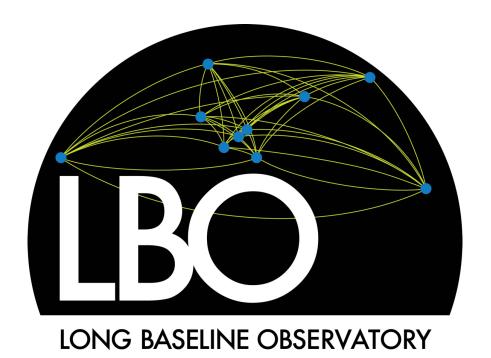

www.lbo.us

The Long Baseline Observatory is a facility of the National Science Foundation operated under cooperative agreement by Associated Universities, Inc.



