



VLBA AIPS Data Reduction

Amy Mioduszewski (NRAO)



For AIPS tutorial today

- If you have a Mac running Yosemite or El Capitan operating systems, test if you have XII installed:
 - Bring up spotlight and type “XQuartz” and if you have it, it will come up if not:
 - install XII, which you can find at:
<http://xquartz.macosforge.org/landing>.
 - Download [XQuartz-2.7.11.dmg](#)

AIPS Resources

- AIPS Cookbook contains a huge amount of information
 - can be found on-line at:
www.aips.nrao.edu/CookHTML/CookBook.html
 - [Chapter 9: Reducing VLBI Data In AIPS](#) is best used as a reference
 - [Appendix C: A Step-by-Step Guide to VLBA Data Reduction in AIPS](#) is the best place to start
 - [Chapter 3: Basic AIPS Utilities](#) and [Chapter 12: AIPS for the More Sophisticated User](#) are also very helpful
 - There are also linked pdf version if you want to download a copy of the whole cookbook available at:
<ftp://ftp.aoc.nrao.edu/pub/software/aips/TEXT/PUBL/COOKBOOK.PDF>

AIPS Help and Explain files

- Help files
 - inside AIPS you can type “help *taskname*” for information on the inputs to the task
- Explain files
 - inside AIPS you can type “explain *taskname*” which will give you everything you get with “help *taskname*” with the addition of more information
 - Explain files are available on-line, and you can click the task/verb name in the on-line and linked pdf Cookbooks.
 - The VLBA tutorial also contains links to the on-line explain files

AIPS Philosophy

Don't touch the data, do it all in tables

- AIPS has its own data structure. Inside AIPS you will have catalog with the data/image and all the associated tables under one name/catalog #
 - on disk these are actually separate files with not very human readable names associated with your AIPS number and catalog number.
- All calibration and flagging is done in tables
 - This means almost (almost) everything you do can be undone by deleting a table
 - Best practice is to always produce a new table

AIPS Tables

- The primary tables we will deal with are:
 - FG flag table
 - list of times, antennas, polarizations etc to flag
 - SN calibration solution table
 - output of most calibration tasks
 - contains incremental calibration steps
 - CL calibration table
 - contains all the calibration
 - you usually apply the latest SN table to the highest numbered CL table
- Other important tables:
 - TY – Tsys
 - GC – Gain curve
 - AN – Antenna
 - NX – Index (list of scans and time and sources)
 - FQ (frequency); HI (history); WX (weather)...

AIPS tasks/inputs/verbs

- “tasks” are the main programs used for calibration
 - each has a set of inputs that control what the task does
 - type “*inp taskname*” to see the inputs.
 - type “*go taskname*” to run the task
 - if you set the task (i.e., type “*task ‘taskname’*”) then you can just type “*inp*” or “*go*”
 - “verbs” are AIPS commands that you run by just typing their names, some have inputs but usually many fewer than AIPS task. Important verbs include:
 - *getn cat #* – get the name of a catalog # and put it in INNAME, INCLASS, and INSEQ
 - *tget taskname* – get the task and the inputs the last time the task was run (probably the most useful command in AIPS)
 - *uc* – list uvdata catalog
 - *mc* – list map (image) catalog

AIPS Procedures

- Most of the data reduction you will see today will use “procedures”, which are scripts that put together AIPS tasks and verbs to do part of the calibration
- The set of procedures you will be using are called VLBAUTIL
- To use a procedure you must first load the procedure
 - type “run *procedure*” (e.g., run vlbautil)
 - to run the procedure you type the procedure name

VLBA data reduction

Basic steps (procedure/task)

I. Fix the data

- sort, create index (NX) table, create first CL table and/or get the polarization or subarray labeling sorted if needed (none of this is needed for this tutorial) ([VLBAFIX](#))
- correct Earth Orientation Parameters (EOPs) ([VLBAEOPS](#))
 - when the DiFX correlator correlates the data 1-2 weeks after the observation it uses the best EOPs available, but at a later date there are usually better ones. This improves phase referencing and astrometry and should always be done
- correct ionospheric delay ([VLBATECR](#))
 - this is important mostly for lower frequencies ($\nu < 10\text{GHz}$)
 - based on models using gps measurements so not perfect

VLBA data reduction

Basic steps ([procedure](#)/[task](#))

2. Amplitude and delay correction, note that the amplitude calibration procedure we will perform is different than in the past due to some changes in the amplitude performance of the rdbe system. You can use this procedure on old data, it will not hurt anything.
 - Correct for digital sampling threshold errors ([VLBACCOR](#))
 - Remove instrumental delays ([VLBAMPCL](#) or [VLBAPCOR](#))
 - Seen as phase “jumps” between IFs
 - Calibrate the bandpass shape ([VLBABPSS](#))
 - Perform amplitude calibration ([VLBAAMP](#))
 - Use Tsys and gain curves to finally set amplitudes.


VLBA data reduction

Basic steps (procedure/task)

3. Calibrate time dependent phases, otherwise known as fringe fitting (**FRING**)
4. Apply all the calibration up to this point and if not spectral line observation average in frequency to reduce size of data.
 - create single source data sets with **SPLIT**
 - keep multi sources data sets by using **SPLAT**
5. Create image and “clean” it using **IMAGR**
6. Self-calibrate the data with **CALIB**

VLBA Tutorial

- The tutorial is at: <https://go.nrao.edu/vlba-tut2>
- This tutorial is a simple continuum and includes imaging and self-calibration
- The data includes 3 sources from an observation from the MOJAVE survey.
 - MOJAVE is a large VLBA project to monitor Active Galactic Nuclei at 15GHz and includes polarization. You can find more information on MOJAVE at <http://www.physics.purdue.edu/MOJAVE/index.html>
 - Includes 2 BL Lac objects and 1 quasar.
 - Original data had 22 targets, but 3 sources are copied out and the sources was averaged slightly in time and frequency so that the dataset is small.

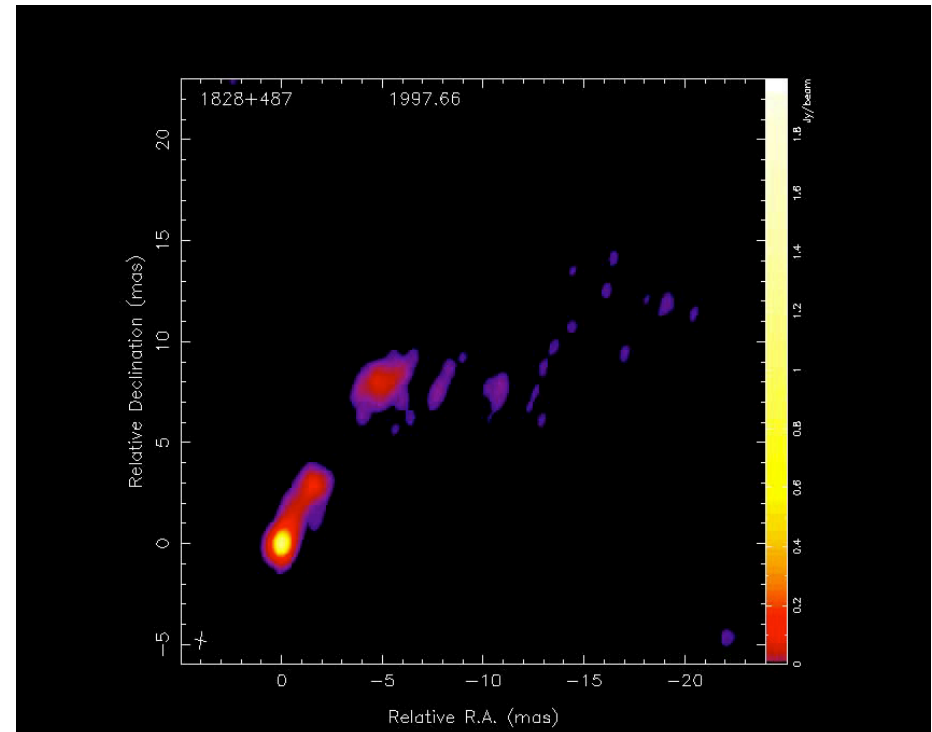

VLBA Tutorial

Let's begin, log in:

- Launch (Linux/Mac) Terminal or a (Windows) Terminal Emulator (e.g. MobaXterm).
- To login to the remote server use: `ssh -X aipsuser1###@spectro.astro.cornell.edu`
 - Use the **###** assigned to your table, ONE PER TABLE
- When prompted for a password, enter: `nraodays1###`
- type:
 - `cd ~/aips`
 - `bash ifXerr`
 - `aips tv=local:0`
 - Then use aips user number **###**

The tutorial is at:

<https://go.nrao.edu/vlba-tut2>

Start with step 5.2 (Loading Data into AIPS).

Other stuff

- If you go wrong somewhere you can continue with the imaging and self-cal by loading the *.SPLIT.I data which is also in the \$MYAIP area. See section 6.16 of the tutorial.
- If you want learn about phase referencing and/or spectral line data reduction see a second VLBA tutorial which can be found at: <https://go.nrao.edu/vlba-tut>

Also, please fill out the survey which you can find at go.nrao.edu/nrao-cdsurvey



www.nrao.edu
science.nrao.edu
public.nrao.edu

*The National Radio Astronomy Observatory is a facility of the National Science Foundation
operated under cooperative agreement by Associated Universities, Inc.*